

SPACE

Apparecchio led circolare adatto per installazione a sospensione. Corpo in alluminio estruso e caladrato, verniciato con polveri epossipoliesteri di colore bianco, grigio e nero antingiallente con finitura gofrata fine. Diffusore in policarbonato opale satinato ad alto comfort visivo.

Circular LED fixture suitable for pendant installation. Body made of extruded and calendered aluminum, painted with epoxy-polyester powders in white, gray and black non-yellowing color with fine embossed finish. Satin opal polycarbonate diffuser with high visual comfort.

CARATTERISTICHE / MAIN FEATURES



Class II



CE



IP 40



IK 07



7
WARRANTY



CRI >80
CRI >90



L80-B50
100.000h



Mac Adams 3



RG0
RG1



UGR
<22




Bianco
White



Grigio
Grey



Nero
Black

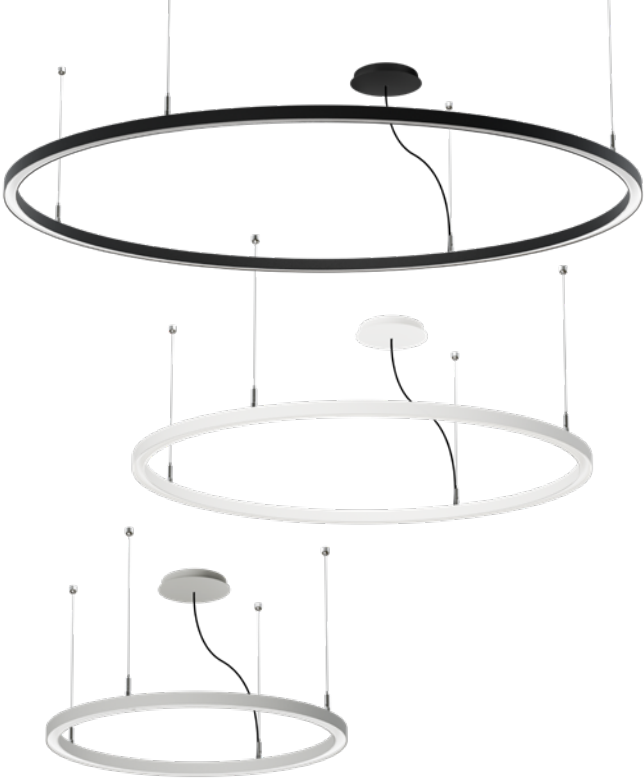

CODIFICA CODICE / CODING

Art.	+	Mod.	+	°K (CRI)	+	W. tot.	+	Options
2009		R6		97 = 2700°K (CRI >90) *		41		BL = on/off ○ Bianco opaco / Matt white
		R9		93 = 3000°K (CRI >90)		63		NL = on/off ● Nero opaco / Matt black
		R2		94 = 4000°K (CRI >90)		88		GL = on/off ○ Grigio opaco / Matt grey

* disponibilità su richiesta / * available on request

Δ LUMEN

	°K	CRI	% Lm
97	2700	> 90	-5.50%
93	3000	> 90	-3.80%
94	4000	> 90	standard

DOTAZIONE / STANDARD EQUIPMENT

- Diffusore in policarbonato incluso.	- Polycarbonate diffuser included.
- Kit sospensione incluso.	- Suspension kit included.
- Driver 24V incluso.	- 24V driver included.
- Rosone porta driver incluso.	- Ceiling rose included.
- Cavo di alimentazione incluso.	- Power cable included.

INSTALLAZIONE / INSTALLATION

Apparecchio adatto per installazione a sospensione.

Suspended installation.


Mod. R6

Ottica
Diffusore in policarbonato opale satinato ad alto comfort visivo.

Corpo
Corpo in alluminio estruso verniciato con polveri epossipoliestere di colore bianco, grigio o nero antingiallente con finitura gofrata fine.


Optic
Anti-glare satin opal polycarbonate diffuser.

Body
Epoxy-polyester powder-coated extruded aluminum body in white, gray or black non-yellowing color with fine embossed finish.



ESEMPIO CODIFICA CODICE 4000K - CRI>80 - ON/OFF
E.G. ARTICLE REFERENCE 4000K - CRI>80 - ON/OFF

Code	W	°K	CRI	Lm OUTPUT	ØxH (mm)	Col.
2009R69441BL	41	4000	≥90	3108	600 x 25	○
2009R69441GL	41	4000	≥90	3108	600 x 25	●
2009R69441NL	41	4000	≥90	3108	600 x 25	●

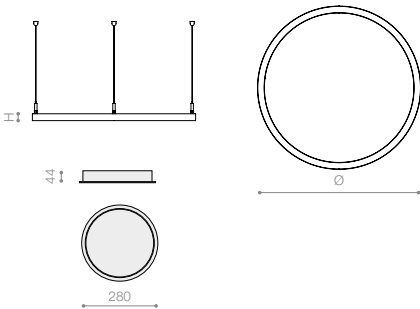



Mod. R9

Ottica
Diffusore in policarbonato opale satinato ad alto comfort visivo.

Corpo
Corpo in alluminio estruso verniciato con polveri epossipoliestere di colore bianco, grigio o nero antingiallente con finitura gofrata fine.


Optic
Anti-glare satin opal polycarbonate diffuser.

Body
Epoxy-polyester powder-coated extruded aluminum body in white, gray or black non-yellowing color with fine embossed finish.

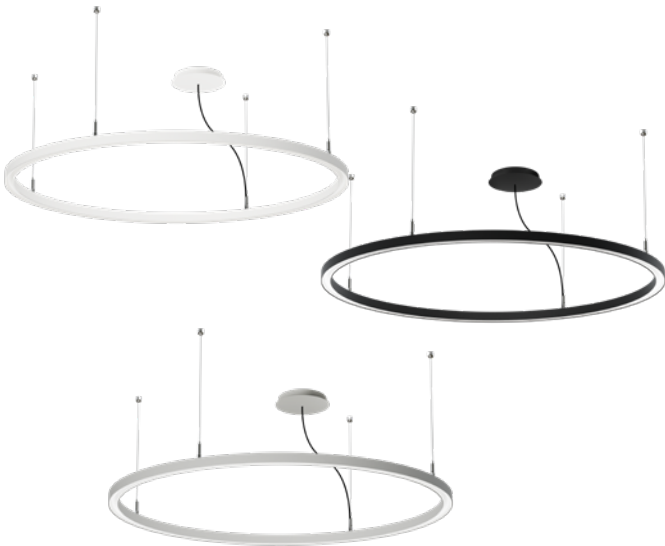

ESEMPIO CODIFICA CODICE 4000K - CRI>80 - ON/OFF
E.G. ARTICLE REFERENCE 4000K - CRI>80 - ON/OFF

Code	W	°K	CRI	Lm OUTPUT	ØxH (mm)	Col.
2009R99463BL	63	4000	≥90	4776	920 x 25	○
2009R99463GL	63	4000	≥90	4776	920 x 25	●
2009R99463NL	63	4000	≥90	4776	920 x 25	●

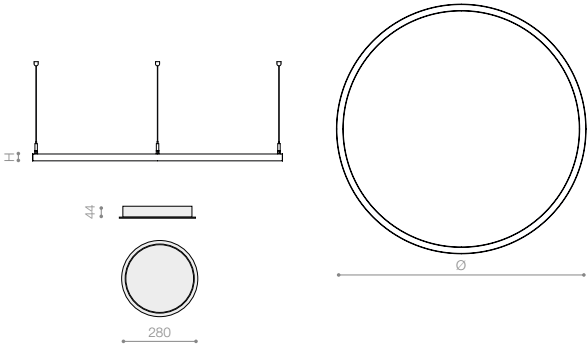



Mod. R2

Ottica
Diffusore in policarbonato opale satinato ad alto comfort visivo.

Corpo
Corpo in alluminio estruso verniciato con polveri epossipoliestere di colore bianco, grigio o nero antingiallente con finitura goffrata fine.

Optic
Anti-glare satin opal polycarbonate diffuser.

Body
Epoxy-polyester powder-coated extruded aluminum body in white, gray or black non-yellowing color with fine embossed finish.



UGR<22

ESEMPIO CODIFICA CODICE 4000K - CRI>80 - ON/OFF
E.G. ARTICLE REFERENCE 4000K - CRI>80 - ON/OFF

Code	W	°K	CRI	Lm OUTPUT	ØxH (mm)	Col.
2009R29488BL	88	4000	≥90	6671	1270 x 25	○
2009R29488GL	88	4000	≥90	6671	1270 x 25	●
2009R29488NL	88	4000	≥90	6671	1270 x 25	●

