

RING

Apparecchio led da interni con installazione ad incasso. Anello in lamiera d'acciaio verniciata con polveri epossipoliestere di colore bianco o nero, antingiallente con finitura goffrata fine e corpo in alluminio tornito tranciato verniciato con polveri epossipoliestere di colore nero (pretrattamento di fosfatazione e sgrassaggio). Driver elettronico 220-240V 50/60Hz. Prodotto costruito in conformità alle vigenti norme EN / IEC 60598-1. I

Led indoor spotlight for recessed installation. Ring in steel sheet painted with white or black epoxy-polyester powders, anti-yellowing with fine embossed finish and body in sheared turned aluminum painted with black epoxy-polyester powders (pre-treatment of phosphating and degreasing). Electronic driver 220-240V 50/60 Hz. Manufactured in accordance with EN / IEC 60598-1.

CARATTERISTICHE / MAIN FEATURES









CODIFICA CODICE / CODING

Art.	+	Mod.	+	°K (CRI)	+	W. tot.	+	Options	○ Bianco opaco	Options	● Nero opaco
6024		RS	27	= 2700°K (CRI >80)		06		BL	= on/off	NL	= on/off
		RF	30	= 3000°K (CRI >80)		10		BD	= dali 2 / dali 2 push	ND	= dali 2 / dali 2 push
			40	= 4000°K (CRI >80)		15					
			97	= 2700°K (CRI >90)		25					
			93	= 3000°K (CRI >90)							
			94	= 4000°K (CRI >90)							

Δ LUMEN

	°K	CRI	% Lm
27	2700	> 80	-7.64%
30	3000	> 80	-3.02%
40	4000	> 80	standard
97	2700	> 90	-22.45%
93	3000	> 90	-18.25%
94	4000	> 90	-14.30%

DOTAZIONE / STANDARD EQUIPMENT

- Driver IP20 elettronico incluso.
- Molle di fissaggio incluse
- IP20 electronic driver.
- Fixing springs included

INSTALLAZIONE / INSTALLATION

Apparecchio adatto per installazione ad incasso.

Recessed installation.




Mod. RS

Ottica
Ottica media 36° con lente in PMMA ad alto rendimento di flusso, antiabbagliamento ed antiriflesso.

Corpo
Anello rotondo in lamiera d'acciaio verniciata con polveri epossipoliestere di colore bianco o nero, antingiallente con finitura gofrata fine e corpo in alluminio tornito verniciato con polveri epossipoliestere di colore nero. Dissipatore di calore in alluminio estruso anodizzato di colore nero, molle di fissaggio incluse.


Optic
Medium optics 36° with high flux efficiency, anti-glare and anti-reflective PMMA lens.

Body
Round steel plate ring painted with white or black epoxy-polyester powders, non-yellowing with fine embossed finish and turned aluminum body painted with black epoxy-polyester powders. Black anodized extruded aluminum heat sink, fixing springs included.



ESEMPIO CODIFICA CODICE 4000K - CRI>80 - ON/OFF
E.G. ARTICLE REFERENCE 4000K - CRI>80 - ON/OFF

Code	W	°K	CRI	Lm OUTPUT	ØxH (mm)	Col.
6024RS4006BL	6	4000	≥80	553	55 x 65	●
6024RS4010BL	10	4000	≥80	1104	65 x 60	●
6024RS4015BL	15	4000	≥80	1713	86 x 70	●
6024RS4025BL	25	4000	≥80	2638	130 x 80	●
6024RS4006NL	6	4000	≥80	553	55 x 65	●
6024RS4010NL	10	4000	≥80	1104	65 x 60	●
6024RS4015NL	15	4000	≥80	1713	86 x 70	●
6024RS4025NL	25	4000	≥80	2638	130 x 80	●

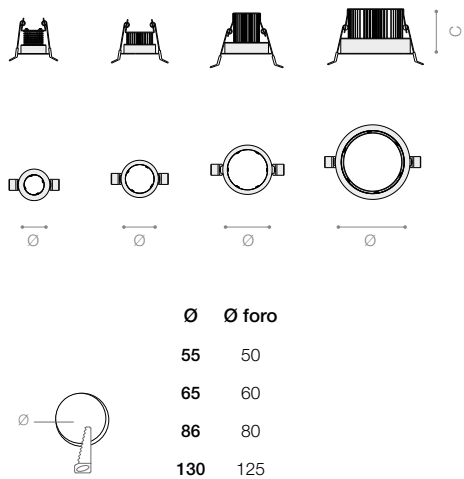


Mod. RF

Ottica
Ottica media diffondente 60° con lente in PMMA ad alto rendimento di flusso, antiabbagliamento ed antiriflesso.

Corpo
Anello rotondo in lamiera d'acciaio verniciata con polveri epossipoliestere di colore bianco o nero, antingiallente con finitura gofrata fine e corpo in alluminio tornito verniciato con polveri epossipoliestere di colore nero. Dissipatore di calore in alluminio estruso anodizzato di colore nero, molle di fissaggio incluse.

Optic
Medium diffusing optics 60°with high flux efficiency, anti-glare and anti-reflective PMMA lens.

Body
Round steel plate ring painted with white or black epoxy-polyester powders, non-yellowing with fine embossed finish and turned aluminum body painted with black epoxy-polyester powders. Black anodized extruded aluminum heat sink, fixing springs included.

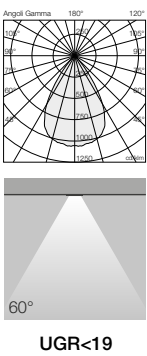

ESEMPIO CODIFICA CODICE 4000K - CRI>80 - ON/OFF
E.G. ARTICLE REFERENCE 4000K - CRI>80 - ON/OFF

Code	W	°K	CRI	Lm OUTPUT	ØxH (mm)	Col.
6024RF4006BL	6	4000	≥80	528	55 x 65	●
6024RF4010BL	10	4000	≥80	1055	65 x 60	●
6024RF4015BL	15	4000	≥80	1637	86 x 70	●
6024RF4025BL	25	4000	≥80	2522	130 x 80	●
6024RF4006NL	6	4000	≥80	528	55 x 65	●
6024RF4010NL	10	4000	≥80	1055	65 x 60	●
6024RF4015NL	15	4000	≥80	1637	86 x 70	●
6024RF4025NL	25	4000	≥80	2522	130 x 80	●

