

BIN - BN00



Binario elettrificato Eurostandard a 4 conduttori in trafilato di alluminio colore bianco o nero. Versione standard o incassata con accessori per l'installazione. Prodotto costruito in conformità alle vigenti norme EN / IEC 60598-1.

Eurostandard electrified track with 4 wires in white or black extruded aluminium. Standard or recessed version with installation accessories. Manufactured in accordance with EN / IEC 60598-1

CARATTERISTICHE / MAIN FEATURES



BN00 BS 230V 4P



Descrizione



Binario standard elettrificato a 4 conduttori verniciato bianco o nero.

Description

Standard electrified track with 4 conductors white or black painted.

Code	Color	L	Phase	Current and Voltage
BN0004BS10BL	○	1000 mm	3,6/10,8 kVA	16A - 440V / 1A-50Vac FELV
BN0004BS10NL	●	1000 mm	3,6/10,8 kVA	16A - 440V / 1A-50Vac FELV
BN0004BS20BL	○	2000 mm	3,6/10,8 kVA	16A - 440V / 1A-50Vac FELV
BN0004BS20NL	●	2000 mm	3,6/10,8 kVA	16A - 440V / 1A-50Vac FELV
BN0004BS30BL	○	3000 mm	3,6/10,8 kVA	16A - 440V / 1A-50Vac FELV
BN0004BS30NL	●	3000 mm	3,6/10,8 kVA	16A - 440V / 1A-50Vac FELV

BN00 BR 230V 4P



Descrizione

Binario ad incasso elettrificato a 4 conduttori verniciato bianco o nero.

Description

Recessed electrified track with 4 conductors white or black painted.

Code	Color	L	Phase	Current and Voltage
BN0004BR10BL	○	1000 mm	3,6/10,8 kVA	16A - 440V / 1A-50Vac FELV
BN0004BR10NL	●	1000 mm	3,6/10,8 kVA	16A - 440V / 1A-50Vac FELV
BN0004BR20BL	○	2000 mm	3,6/10,8 kVA	16A - 440V / 1A-50Vac FELV
BN0004BR20NL	●	2000 mm	3,6/10,8 kVA	16A - 440V / 1A-50Vac FELV
BN0004BR30BL	○	3000 mm	3,6/10,8 kVA	16A - 440V / 1A-50Vac FELV
BN0004BR30NL	●	3000 mm	3,6/10,8 kVA	16A - 440V / 1A-50Vac FELV

ACCESSORI / ACCESSORIES



ACC321 Tronchese per il taglio dei conduttori del binario
Cutters for cutting track conductors.

BN00 GD - 230V 4P

Descrizione
Giunto diretto

Description
Direct joint

Code (surface)	Code (recessed)	Color	Current	g
BN0000GD00BL	BN0000GD01BL	○	16A - 440V	190,6
BN0000GD00NL	BN0000GD01NL	●	16A - 440V	190,6



BN00 GP - 230V 4P

Descrizione
Giunto passante nascosto

Description
Hidden jointing connector

Code (surface)	Code (recessed)	Color	Current	g
BN0000GP00BL	BN0000GP01BL	○	16A - 440V	50,2
BN0000GP00NL	BN0000GP01NL	●	16A - 440V	50,2



BN00 TAD - 230V 4P

Descrizione
Testata di alimentazione con polarità a destra

Description
Power head with right polarity

Code (surface)	Code (recessed)	Color	Current	g
BN000TAD00BL	BN000TAD01BL	○	16A - 440V	100,4
BN000TAD00NL	BN000TAD01NL	●	16A - 440V	100,4



BN00 TAS - 230V 4P

Descrizione
Testata di alimentazione con polarità a sinistra

Description
Power head with left polarity

Code (surface)	Code (recessed)	Color	Current	g
BN000TAS00BL	BN000TAS01BL	○	16A - 440V	100,4
BN000TAS00NL	BN000TAS01NL	●	16A - 440V	100,4




BN00 GLD - 230V 4P

Descrizione
Giunto a L con polarità a destra

Description
L-shaped joint with right polarity

Code (surface)	Code (recessed)	Color	Current	g
BN000GLD00BL	BN000GLD01BL	○	16A - 440V	190,9
BN000GLD00NL	BN000GLD01NL	●	16A - 440V	190,9

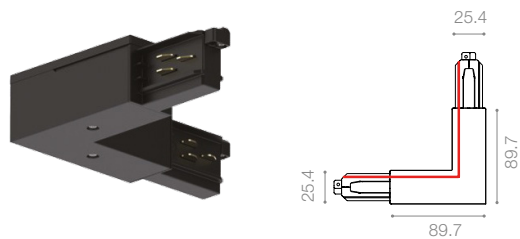

BN00 GLS - 230V 4P

Descrizione
Giunto a L con polarità a sinistra

Description
L-shaped joint with left polarity

Code (surface)	Code (recessed)	Color	Current	g
BN000GLS00BL	BN000GLS01BL	○	16A - 440V	190,9
BN000GLS00NL	BN000GLS01NL	●	16A - 440V	190,9




BN00 GTSS - 230V 4P

Descrizione
Giunto a T con polarità a sinistra-sinistra

Description
T-shaped joint with left-left polarity

Code (surface)	Code (recessed)	Color	Current	g
BN00GTSS00BL	BN00GTSS01BL	○	16A - 440V	285,7
BN00GTSS00NL	BN00GTSS01NL	●	16A - 440V	285,7

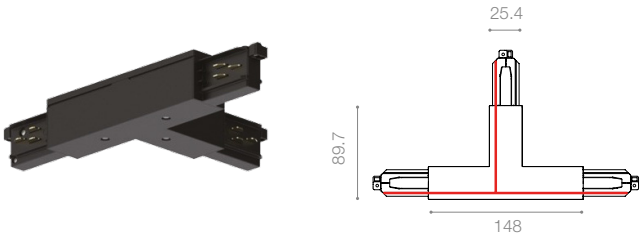


BN00 GTSD - 230V 4P

Descrizione
Giunto a T con polarità a sinistra-destra

Description
T-shaped joint with left-right polarity

Code (surface)	Code (recessed)	Color	Current	g
BN00GTSD00BL	BN00GTSD01BL	○	16A - 440V	285,7
BN00GTSD00NL	BN00GTSD01NL	●	16A - 440V	285,7

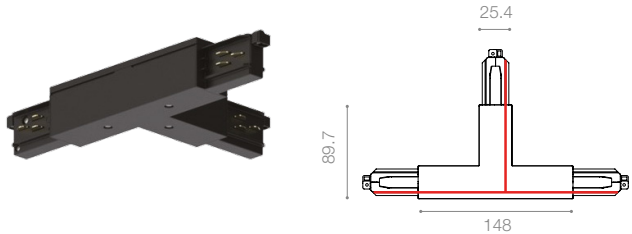


BN00 GTDS - 230V 4P

Descrizione
Giunto a T con polarità a destra-sinistra

Description
T-shaped joint with right-left polarity

Code (surface)	Code (recessed)	Color	Current	g
BN00GTDS00BL	BN00GTDS01BL	○	16A - 440V	285,7
BN00GTDS00NL	BN00GTDS01NL	●	16A - 440V	285,7

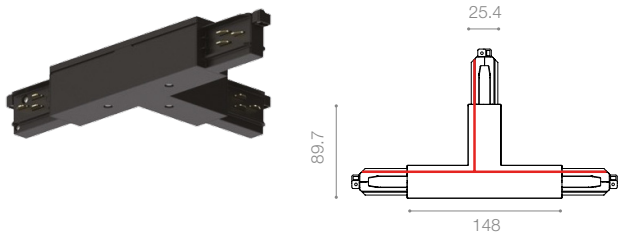


BN00 GTDD - 230V 4P

Descrizione
Giunto a T con polarità a destra-destra

Description
T-shaped joint with right-right polarity

Code (surface)	Code (recessed)	Color	Current	g
BN00GTDD00BL	BN00GTDD01BL	○	16A - 440V	285,7
BN00GTDD00NL	BN00GTDD01NL	●	16A - 440V	285,7

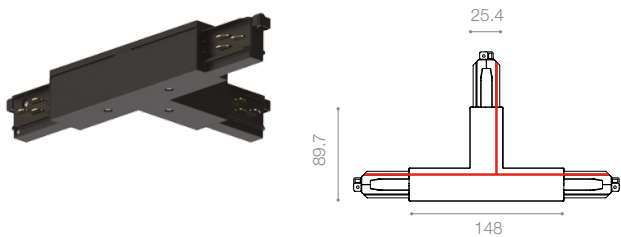


BN00 GX - 230V 4P

Descrizione
Giunto a X

Description
X-shaped joint

Code (surface)	Code (recessed)	Color	Current	g
BN0000GX00BL	BN0000GX01BL	○	16A - 440V	380,8
BN0000GX00NL	BN0000GX01NL	●	16A - 440V	380,8

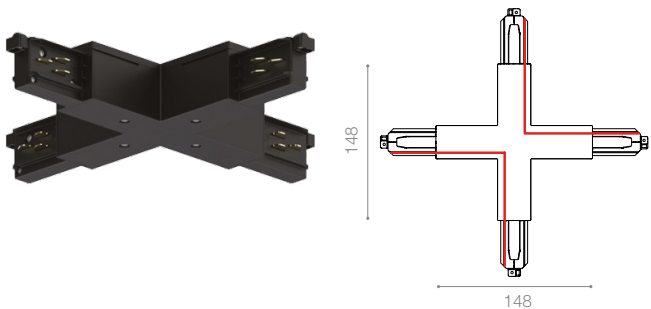

BN00 TPS - 230V 4P

Descrizione
Tappo di chiusura per binario standard colore bianco o nero

Description
Black or white color closing cap for standard track

Code	Color	Binario	A	B	g
BN0000TPS0BL	○	standard	31,4 mm	37,8 mm	8,6
BN0000TPS0NL	●	standard	31,4 mm	37,8 mm	8,6




BN00 TPR - 230V 4P

Descrizione
Tappo di chiusura per binario da incasso colore bianco o nero

Description
Black or white color closing cap for recessed track

Code	Color	Binario	A	B	g
BN0000TPR0BL	○	incasso/recessed	52 mm	37,8 mm	8,6
BN0000TPR0NL	●	incasso/recessed	52 mm	37,8 mm	8,6



BN00 PR - 230V 4P

Descrizione
Guaina di protezione verniciata bianca o nera

Description
White or black painted protective sheath

Code	Color	L	Material	g
BN0000PR00BL	○	1000 mm	PVC	103,8
BN0000PR00NL	●	1000 mm	PVC	103,8




BN00 SS - 230V 4P

Descrizione
Staffa per fissaggio a soffitto

Description
Ceiling fixing bracket

Code	Color	Fixing	Material	g
BN0000SS00BL	○	Vite / Screw	Aluminium	13,4
BN0000SS00NL	●	Vite / Screw	Aluminium	13,4



BN00 KS - 230V 4P

Descrizione
Kit completo per il fissaggio a sospensione con singolo cavo d'acciaio e tenditore automatico

Description
Complete kit for suspension (steel cable and automatic tensioner)

Code	Color	L	Ø cable	Material	g
BN0000KS10BL	○	1500 mm	1,5 mm	Acciaio / Steel	55,3
BN0000KS10NL	●	1500 mm	1,5 mm	Acciaio / Steel	55,3
BN0000KS30BL	○	3000 mm	1,5 mm	Acciaio / Steel	69,3
BN0000KS30NL	●	3000 mm	1,5 mm	Acciaio / Steel	69,3
BN0000KS50BL	○	5000 mm	1,5 mm	Acciaio / Steel	87,8
BN0000KS50NL	●	5000 mm	1,5 mm	Acciaio / Steel	87,8



ESEMPIO DI INSTALLAZIONE BINARIO A 230VAC

EXAMPLE OF 230VAC TRACK INSTALLATION

