
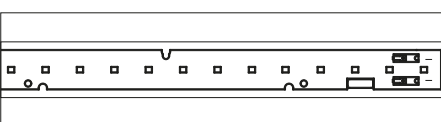
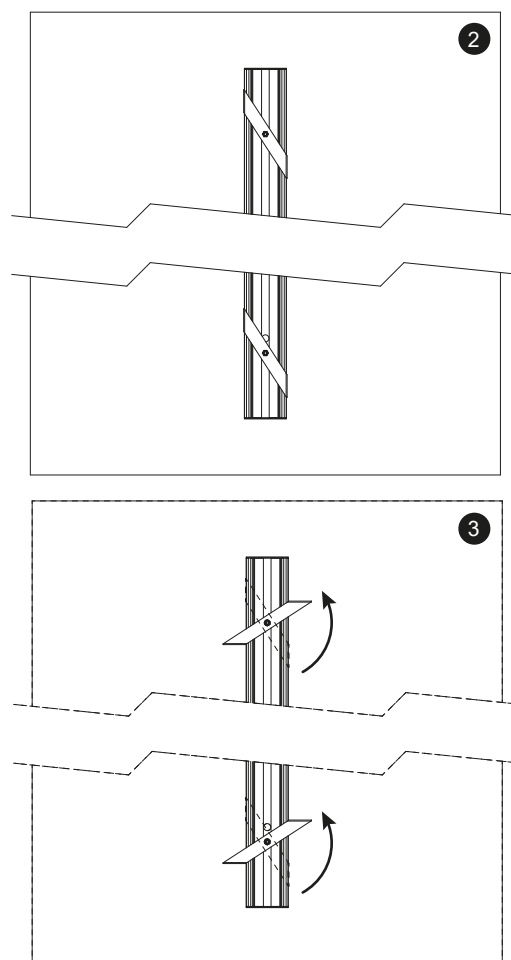
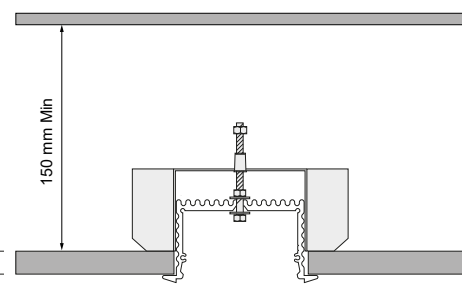
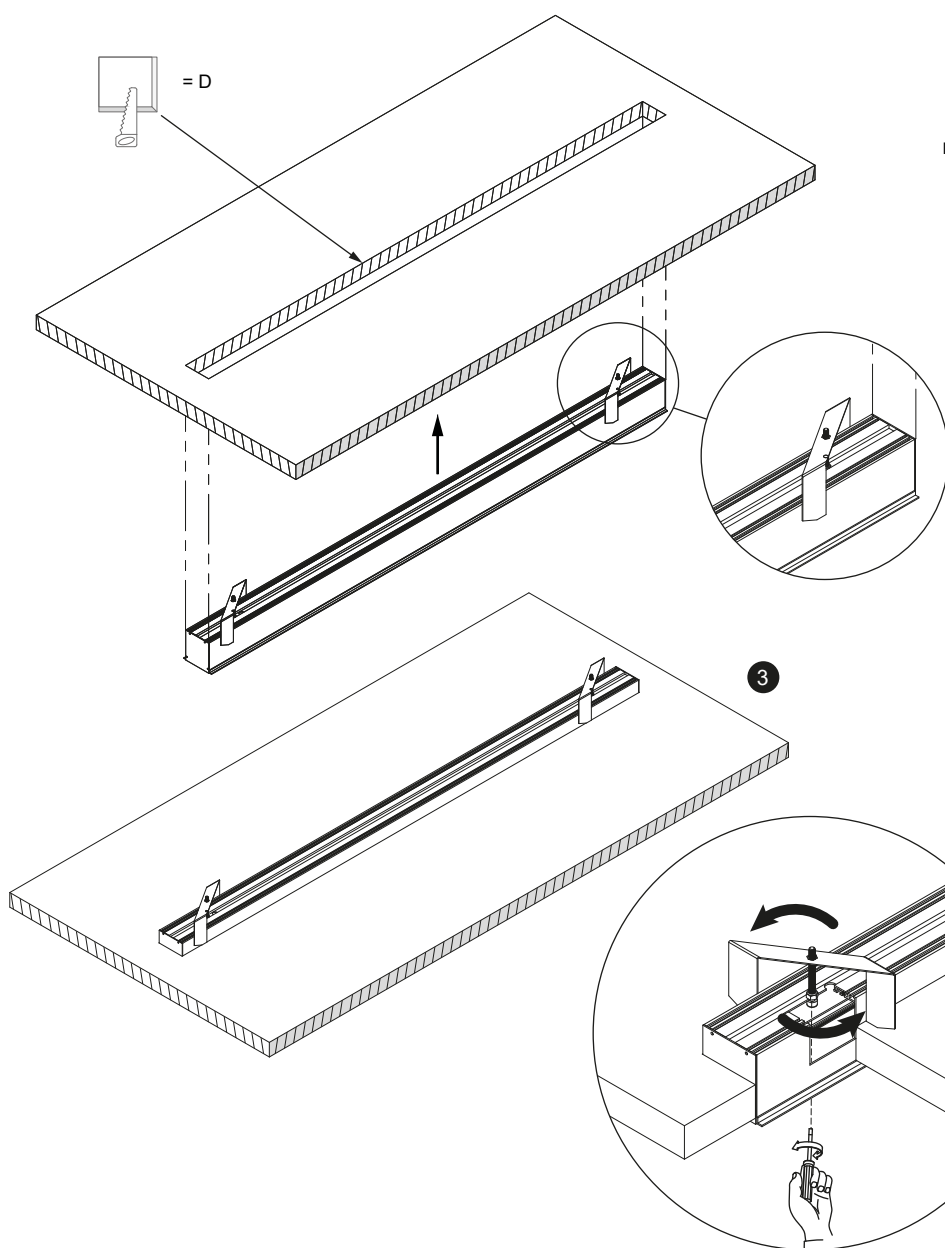



IP40	850°		IK07	24 Vdc
------	------	---	------	--------

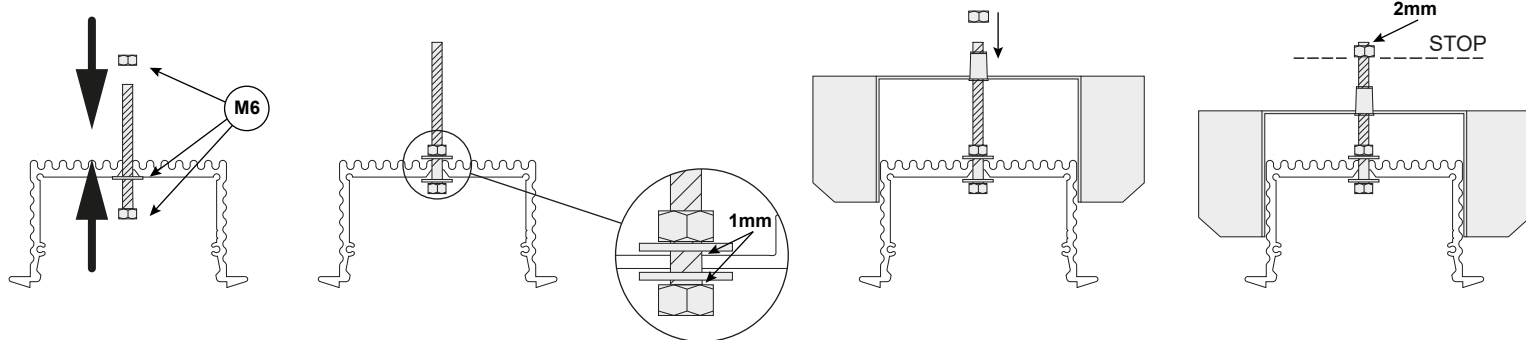








LED - (Bianco/White)

LED + (Bianco/White)


LED - (Bianco/White)

LED + (Bianco/White)

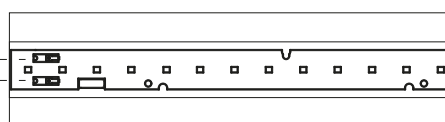


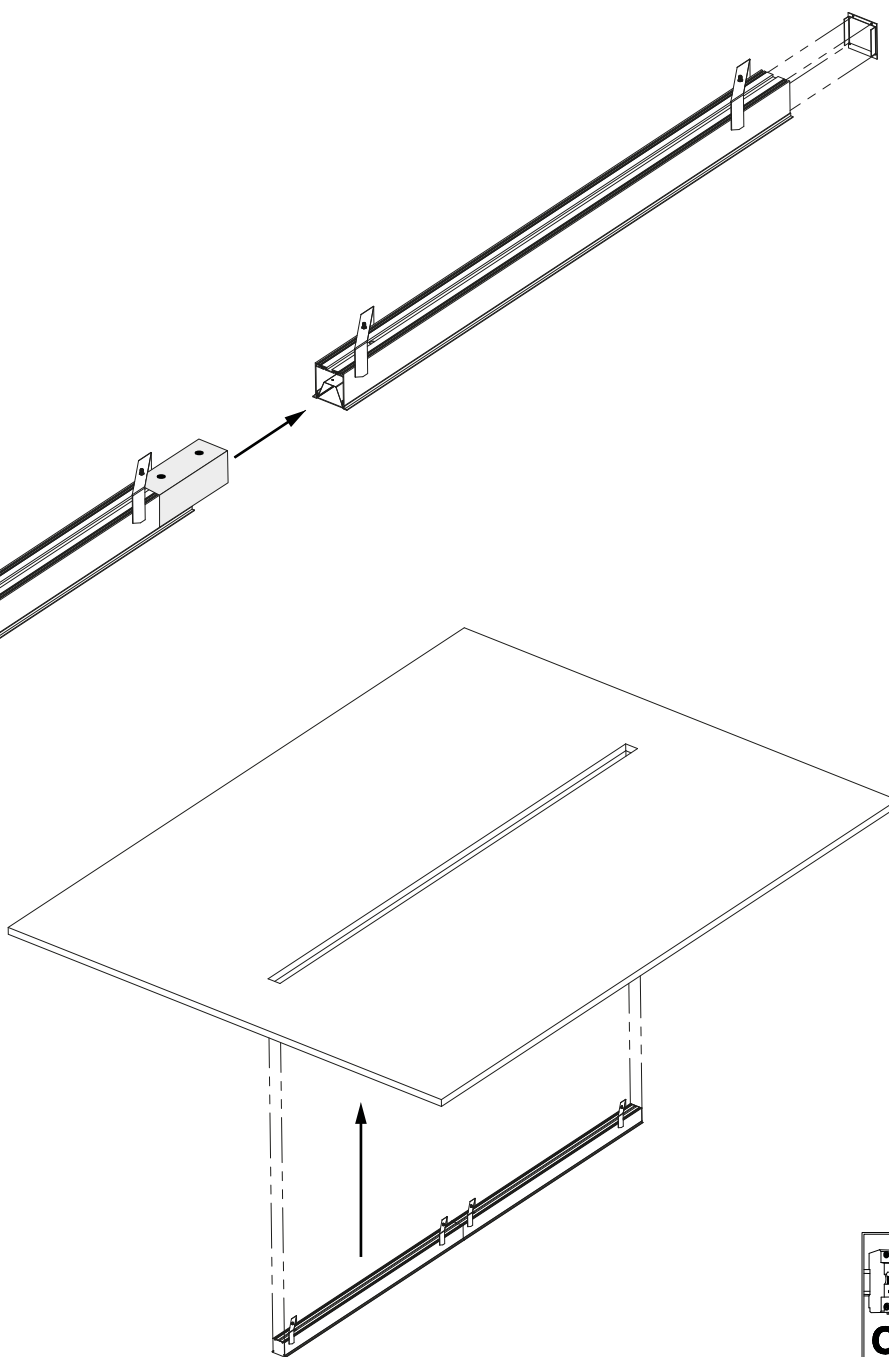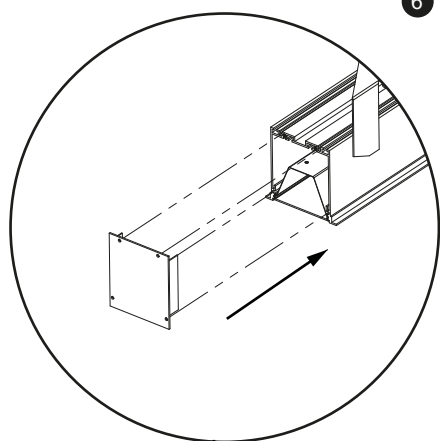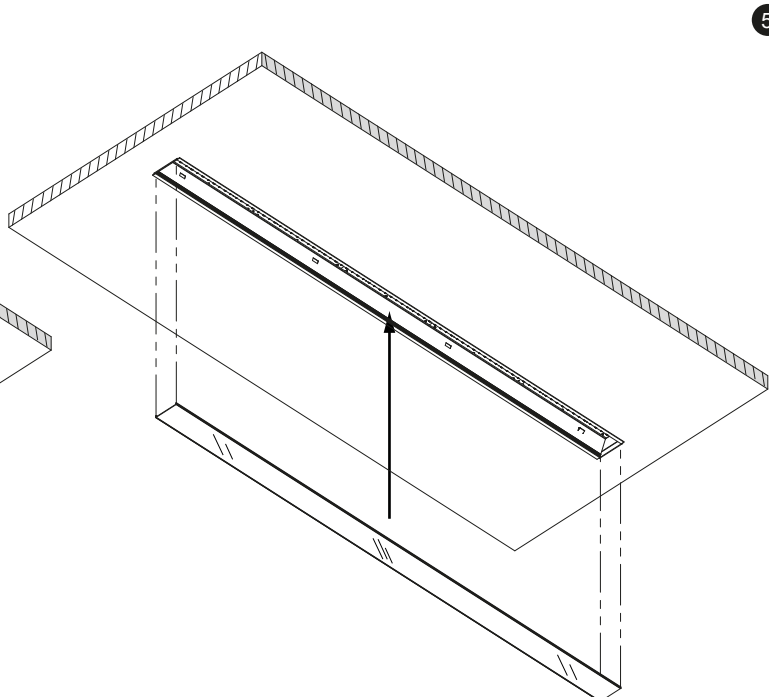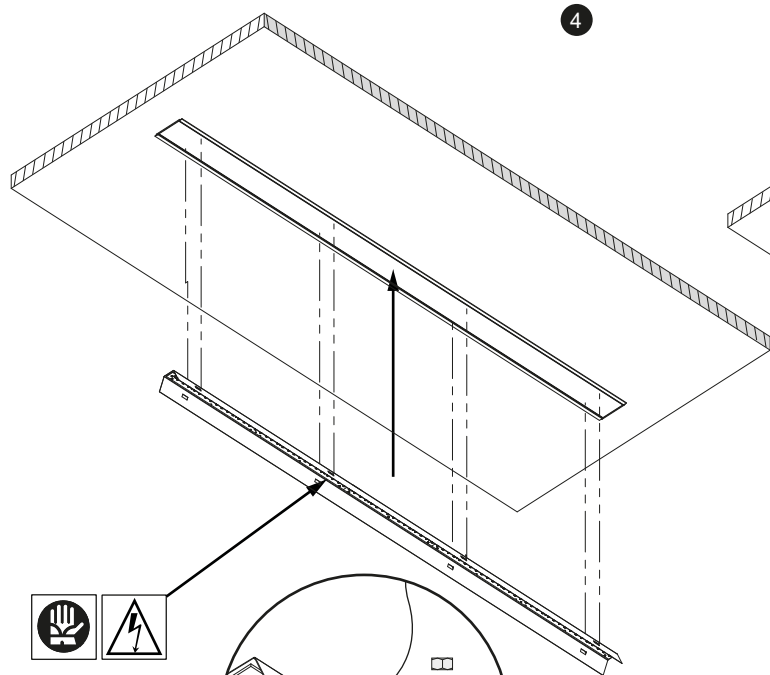


7

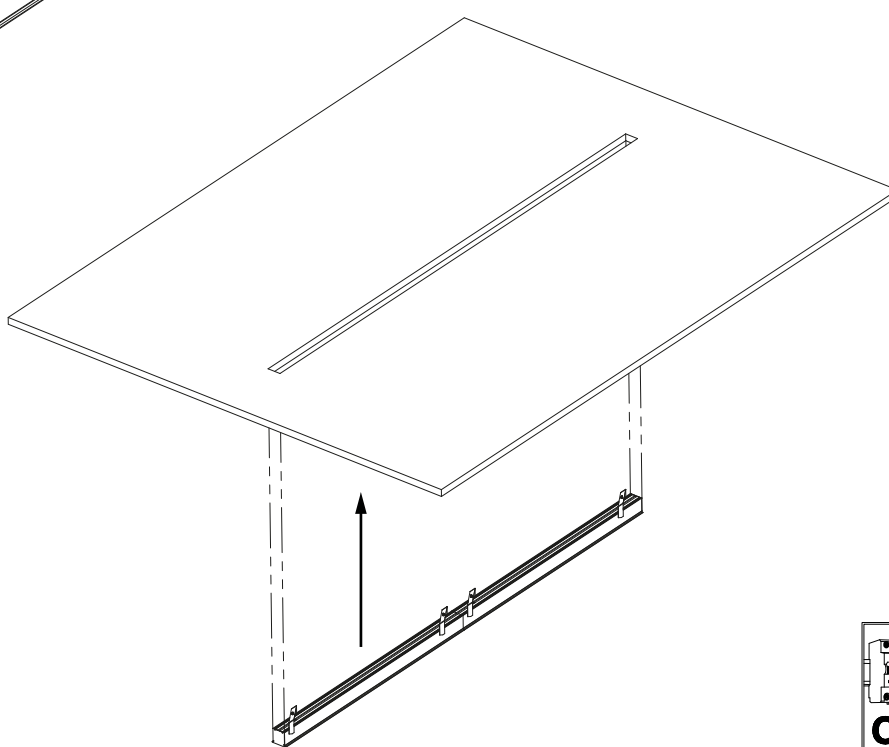



8



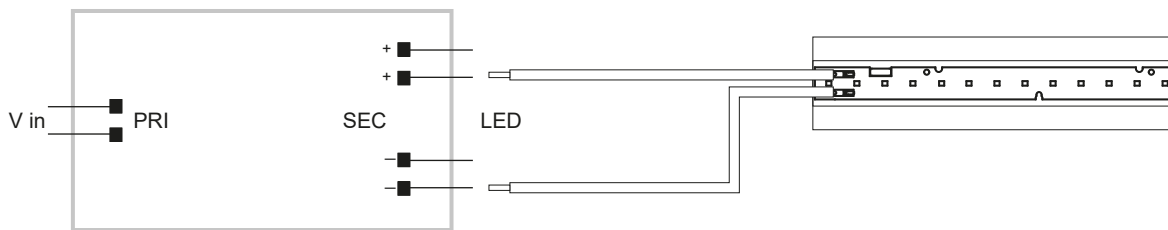


LED load must be distributed on both output terminal blocks.
Il carico LED deve essere distribuito su entrambi i morsetti di uscita.

(max. LED distance: 1 mt / 3 ft - Distanza max. LED: 1 mt / 3 ft)

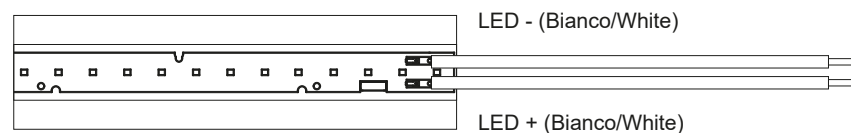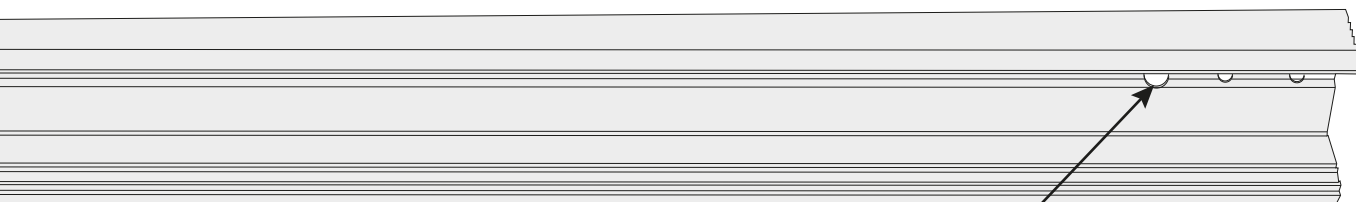


CAVI PER CONNESSIONI L44 mm - CABLE FOR CONNECTION L44 mm

Modulo angolare / Angular module



Modulo lineare / Linear module



Driver / Driver

