



TEC-MAR®

L I G H T I N G

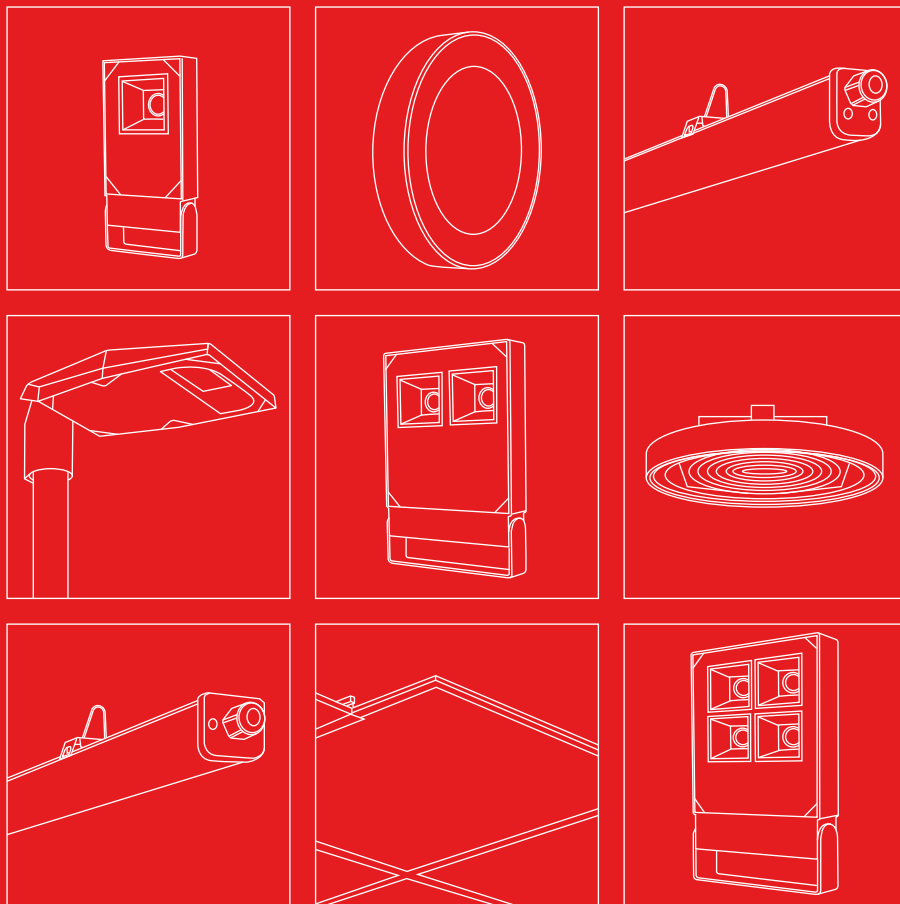


CONSEGNA
72H
EXPRESS

7026 POLAR 1



mod.PR
ottica simmetrica 90°



mod.AR
ottica asimmetrica 45°




QR code Sito Web


Code	Mod	W tot.	°K - CRI	Lm OUTPUT	Lm/W
7026PR4040GL	PR	40	4000K - CRI>80	6050	151
7026AR4040GL	AR	40	4000K - CRI>80	5727	143
7026PR4073GL	PR	73	4000K - CRI>80	11675	160
7026AR4073GL	AR	73	4000K - CRI>80	11052	151

220 V~ IP66 | IK08 | RG0/RG1 | CRI >80 CRI >90 | 3 step MacAdam | **L90-B10 >100.000h** | 10 kV | Ball Test DIN 18032-3 | 7 YEARS WARRANTY | 100% Rigenerabile 100% Regenerabile | Pre-cablato H07RN-F (1000 mm)

7027 POLAR 2



mod.PR
ottica simmetrica 90°



mod.AR
ottica asimmetrica 45°




QR code Sito Web


Code	Mod	W tot.	°K - CRI	Lm OUTPUT	Lm/W
7027PR4090GL	PR	90	4000K - CRI>80	15061	167
7027AR4090GL	AR	90	4000K - CRI>80	14258	158
7027PR4120GL	PR	120	4000K - CRI>80	18039	150
7027AR4120GL	AR	120	4000K - CRI>80	17077	142

220 V~ IP66 | IK08 | RG0/RG1 | CRI >80 CRI >90 | 3 step MacAdam | **L90-B10 >100.000h** | 10 kV | Ball Test DIN 18032-3 | 7 YEARS WARRANTY | 100% Rigenerabile 100% Regenerabile | Pre-cablato H07RN-F (1000 mm)

7028 POLAR 3



mod.PR
ottica simmetrica 90°



mod.AR
ottica asimmetrica 45°




QR code Sito Web


Code	Mod	W tot.	°K - CRI	Lm OUTPUT	Lm/W
7028PR4190GL	PR	190	4000K - CRI>80	28668	151
7028AR4190GL	AR	190	4000K - CRI>80	27139	143

220 V~ IP66 | IK08 | RG0/RG1 | CRI >80 CRI >90 | 3 step MacAdam | **L90-B10 >100.000h** | 10 kV | Ball Test DIN 18032-3 | 7 YEARS WARRANTY | 100% Rigenerabile 100% Regenerabile | Pre-cablato H07RN-F (1000 mm)

7029 POLAR 4



mod.PR
ottica simmetrica 90°



mod.AR
ottica asimmetrica 45°




QR code Sito Web

Code	Mod	W tot.	°K - CRI	Lm OUTPUT	Lm/W
7029PR4240GL	PR	240	4000K - CRI>80	38704	161
7029AR4240GL	AR	240	4000K - CRI>80	36640	153

220 V~ IP66 | IK08 | RG0/RG1 | CRI >80 CRI >90 | 3 step MacAdam | **L90-B10 >100.000h** | 10 kV | Ball Test DIN 18032-3 | 7 YEARS WARRANTY | 100% Rigenerabile 100% Regenerabile | Pre-cablato H07RN-F (1000 mm)

8150 MIR



mod.S5
ottica diffondente 90°
UGR<25




QR code Sito Web

Code	Mod	W tot.	°K - CRI	Lm OUTPUT	Lm/W	UGR
8150S54100GL	S5	100	4000K - CRI>80	17116	171	<25
8150S54148GL	S5	148	4000K - CRI>80	24936	168	<25
8150S54195GL	S5	195	4000K - CRI>80	33704	173	<25
8150S54220GL	S5	220	4000K - CRI>80	35817	163	<25

220 V~ IP66 | IK08 | **UGR <25** | RG0/RG1 | CRI >80 CRI >90 | 3 step MacAdam | **L90-B10 >100.000h** | 10 kV | Ball Test DIN 18032-3 | 7 YEARS WARRANTY | Connettore rapido incluso

2110 LEA



mod.LD
ottica diffondente 120°




QR code Sito Web

Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	Lunghezza
2110LD4036EL	36	4000K - CRI>80	4851	135	1155 mm
2110LD4054EL	54	4000K - CRI>80	7402	137	1435 mm
2110LD4066EL	66	4000K - CRI>80	9679	147	1435 mm

LED | CE | 220 V_~ 240 | IP66 | IK08 | RG0/RG1 | CRI >80 CRI >90 | 3 step MacAdam | L90-B10 > 60.000 h L80-B50 > 100.000 h | 7 YEARS WARRANTY | Pre-cablato H07RN-F (500 mm)

2100 EVA



mod.LD
ottica diffondente 120°




QR code Sito Web

Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	Lunghezza
2100LD4036EL	36	4000K - CRI>80	4851	135	1155 mm
2100LD4054EL	54	4000K - CRI>80	7402	137	1435 mm
2100LD4072EL	72	4000K - CRI>80	9852	137	1435 mm

LED | CE | 220 V_~ 240 | IP66 | IK08 | RG0/RG1 | CRI >80 CRI >90 | 3 step MacAdam | L90-B10 > 60.000 h L80-B50 > 100.000 h | 7 YEARS WARRANTY

9202 MIG 1B



mod.T2
ottica stradale




QR code Sito Web

Code	Mod	W tot.	°K - CRI	Lm OUTPUT	Lm/W
9202T24050GL	T2	50	4000K - CRI>80	7495	150
9202T24075GL	T2	75	4000K - CRI>80	12026	160
9202T24120GL	T2	120	4000K - CRI>80	16312	136

LED | CE | 220 V_~ 240 | IP66 | IK08 | RG0/RG1 | CRI >70 | 3 step MacAdam | L90-B10 > 100.000h | 10 kV | 7 YEARS WARRANTY | Pre-cablato H07RN-F (800 mm)

7012 ZOE



mod.B3
ottica diffondente 120°





QR code Sito Web

Code	Mod	W tot.	°K - CRI	Lm OUTPUT	Lm/W
7012B34020EL	B3	20	4000K - CRI>80	2021	101
7012B33020EL	B3	20	3000K - CRI>80	1917	96


LED | CE | 220 V_~ 240 | IP66 | IK09 | RG0/RG1 | CRI >80 | 3 step MacAdam | L80-B50>100.000h L90-B10>60.000h | 7 YEARS WARRANTY

1804 QUADRA

1806 QUADRA HP

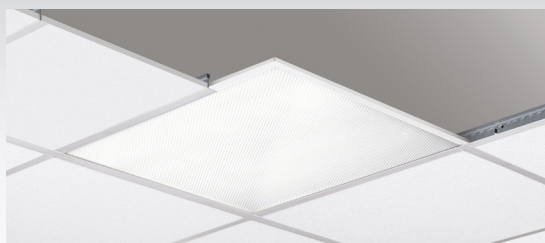

mod.QP
ottica 90° UGR<19



mod.Q3
ottica 120° UGR<22



QR code Sito Web



QR code Sito Web

Code	Mod	W tot.	°K - CRI	Lm OUTPUT	Lm/W	UGR
1804QP0432EL	QP	32	4000K - CRI>80	3619	113	<19
1804Q30432EL	Q3	32	4000K - CRI>80	3667	115	<22
1806QP0432EL	QP	32	4000K - CRI>80	4158	130	<19
ACC037	Kit per installazione a plafone. Dimensioni 600x600 mm					

LED | CE | 220 V_~ 240 | IP20 IP40 | IK08 | RG0/RG1 | CRI >80 | 3 step MacAdam | L80-B50>100.000h L90-B10>60.000h | UGR<19 UGR<22 | 7 YEARS WARRANTY

TEC-MAR

L I G H T I N G

Via delle industrie, 1
26835 Crespiatica (LO)
T. +39 0371 484029
info@tec-mar.it
www.tec-mar.it