

TEC-MAR®
LIGHTING

— READY FOR DELIVERY | 2026 rev. 1


ARCHITECTURAL SELECTION



PERFORMANCE • DESIGN • TECHNICAL SUPPORT • 7 YEARS WARRANTY • MADE IN ITALY

Innovation, Technology, Performance, Design

These have always been our hallmarks in the world of lighting

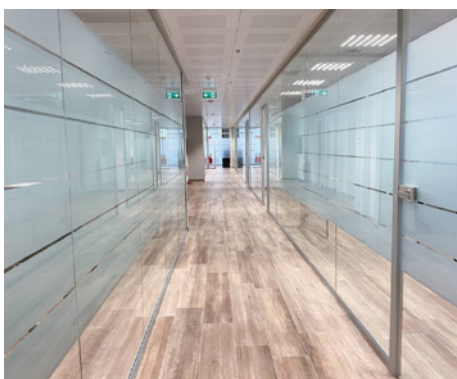

Express shipping 24/48 h

All items in this selection are available in stock.

Dedicated orders, sent to the e-mail address 48h@tec-mar.it, are processed as a priority and shipped within 24/48 hours of receipt.

This service is reserved exclusively for the codes included in this selection.

For orders exceeding 25 pieces per item code, please contact us in advance to check the availability of the requested quantity in stock and ensure correct order processing.

PRODUCT INDEX

WALL



ARC (mod. B6 9W)
Pag. 3



ARC (mod. B6 14W)
Pag. 4



MILO (mod. MD / BD)
Pag. 5



MILO (mod. BS)
Pag. 6



PASO
Pag. 7



PIXEL
Pag. 8

WALL / CEILING



ARC (mod. S6)
Pag. 10



CRIO
Pag. 11



ZOE
Pag. 12



GEM
Pag. 13

SPOTLIGHT



ROD
Pag. 15



ROD (mod. G3)
Pag. 16

BOLLARD



OLAF (mod. MS)
Pag. 18



OLAF (mod. RS)
Pag. 19



OLAF (retrofit)
Pag. 20



BOSTON
Pag. 21

WALL





ARC

Wall





Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
7022B63009BL	B6	9	3000-80	674	60 x 70 x 60	WHITE



mod.B6
Bi-emission 60°





Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
7022B63009GL	B6	9	3000-80	674	60 x 70 x 60	GREY



mod.B6
Bi-emission 60°





Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
7022B63009CL	B6	9	3000-80	674	60 x 70 x 60	CORTEN



mod.B6
Bi-emission 60°





Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
7022B63009NL	B6	9	3000-80	674	60 x 70 x 60	ANTHRACITE



mod.B6
Bi-emission 60°

LED | CE | 220 V= | IP66 | IK08 | RG0/RG1 | 3 step MacAdam | L80-B50 > 75.000h | L80-B20 > 60.000h | SEA TREATMENT | 7 YEARS OF WARRANTY

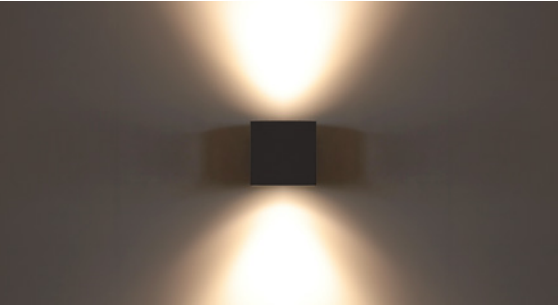



Website QR

ARC

Wall





Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
7022B63014BL	B6	14	3000-80	1407	110 x 112 x 110	WHITE




mod.B6
Bi-emission 60°





Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
7022B63014GL	B6	14	3000-80	1407	110 x 112 x 110	GREY




mod.B6
Bi-emission 60°





Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
7022B63014CL	B6	14	3000-80	1407	110 x 112 x 110	CORTEN



mod.B6
Bi-emission 60°





Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
7022B63014NL	B6	14	3000-80	1407	110 x 112 x 110	ANTHRACITE



mod.B6
Bi-emission 60°


LED | CE | 220 V~ | IP66 | IK08 | RG0/RG1 | 3 step MacAdam | L80-B50 > 75.000h | L80-B20 > 50.000h | SEA TREATMENT | 7 YEARS OF WARRANTY

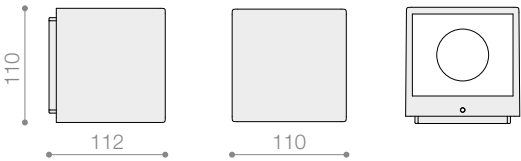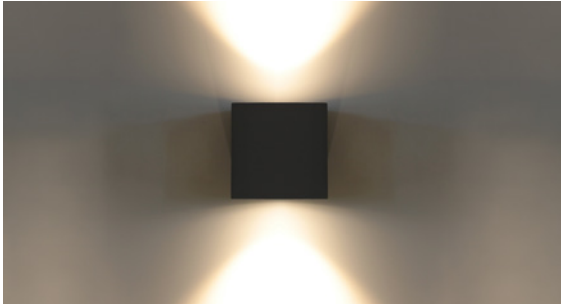


Website QR

MILO mod. MD-BD



Wall



Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
7054MD3008BL	MD	8	3000-80	662	125 x 70 x 65	WHITE
7054MD3008GL	MD	8	3000-80	662	125 x 70 x 65	GREY
7054MD3008CL	MD	8	3000-80	662	125 x 70 x 65	CORTEN
7054MD3008NL	MD	8	3000-80	662	125 x 70 x 65	ANTHRACITE



Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
7054BD3014BL	BD	14	3000-80	1165	125 x 70 x 65	WHITE
7054BD3014GL	BD	14	3000-80	1165	125 x 70 x 65	GREY
7054BD3014CL	BD	14	3000-80	1165	125 x 70 x 65	CORTEN
7054BD3014NL	BD	14	3000-80	1165	125 x 70 x 65	ANTHRACITE



220-240 V~

IP66


IK08

RG0/PG1

3 step MacAdam
L90-B10 >100.000h

SEA TREATMENT

7 YEARS OF WARRANTY

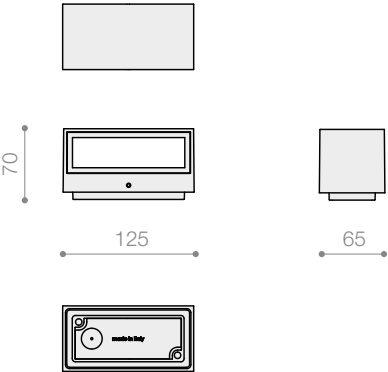

Website QR





MILO mod. BS

Wall





Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
7054BS3015BL	BS	15	3000-80	1500	180 x 112 x 70	WHITE



mod.BS
Bi-emission 120°





Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
7054BS3015GL	BS	15	3000-80	1500	180 x 112 x 70	GREY



mod.BS
Bi-emission 120°




Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
7054BS3015NL	BS	15	3000-80	1500	180 x 112 x 70	ANTHRACITE



mod.BS
Bi-emission 120°

LED | CE | 220 240 V~ | IP66 | IK08 | RG0/RG1 | 3 step MacAdam | L90-B10 >100.000h | SEA TREATMENT | 7 YEARS OF WARRANTY

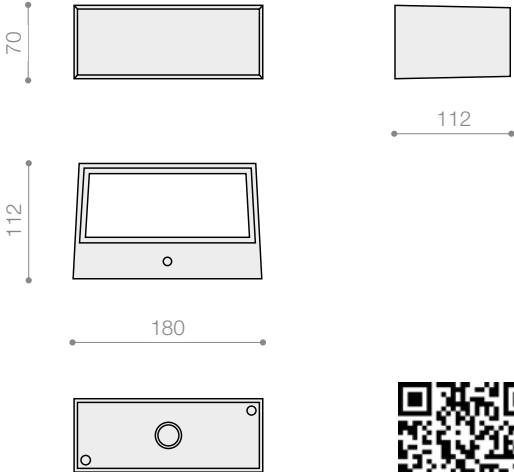



Website QR

PASO



Recessed step light





Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
1001AR3004BL	AR	4,5	3000-80	213	115 x 46 x 83	WHITE
1001AR3004GL	AR	4,5	3000-80	213	115 x 46 x 83	GREY
1001AR3004NL	AR	4,5	3000-80	213	115 x 46 x 83	ANTHRACITE



Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
1001SM3004BL	SM	4,5	3000-80	153	115 x 46 x 83	WHITE
1001SM3004GL	SM	4,5	3000-80	153	115 x 46 x 83	GREY
1001SM3004NL	SM	4,5	3000-80	153	115 x 46 x 83	ANTHRACITE




LED | CE | 220 V~ 240 | IP66 | IK08 | RG0/RG1 | 3 step MacAdam | L80-B50 > 75.000h | L80-B20 > 50.000h | IN - OUT | SEA TREATMENT | 7 YEARS OF WARRANTY

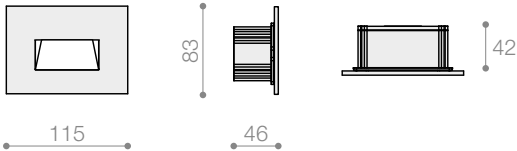



Website QR

PIXEL

Surface-mounted step light


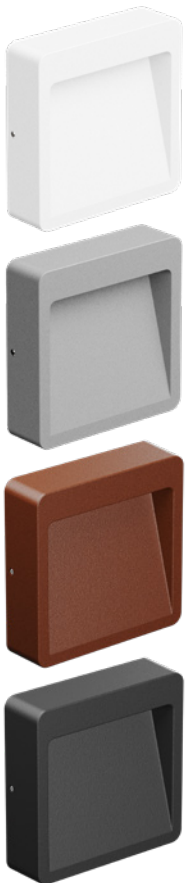


Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
1002AR3006BL	AR	6	3000-80	439	120 x 35 x 120	WHITE





mod.AR
Asymmetrical 45°

Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
1002AR3006GL	AR	6	3000-80	439	120 x 35 x 120	GREY





mod.AR
Asymmetrical 45°

Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
1002AR3006CL	AR	6	3000-80	439	120 x 35 x 120	CORTEN





mod.AR
Asymmetrical 45°

Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
1002AR3006NL	AR	6	3000-80	439	120 x 35 x 120	ANTHRACITE



mod.AR
Asymmetrical 45°

LED | CE | 220 V~ | IP66 | IK08 | RG0/RG1 | 3 step MacAdam | L80-B50 > 75.000h | L80-B20 > 50.000h | SEA TREATMENT | 7 YEARS OF WARRANTY

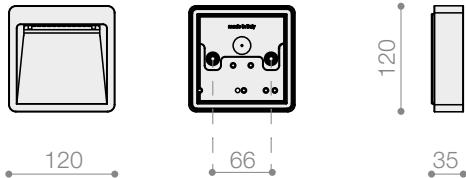

Installation option on
standard recess box 503



Website QR

WALL / CEILING





ARC

Ceiling





Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
7022S63006BL	S6	6,5	3000-80	457	60 x 60 x 70	WHITE
7022S63010BL	S6	10	3000-80	784	100 x 100 x 100	WHITE





mod.S6
Medium diffusing 60°

Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
7022S63006GL	S6	6,5	3000-80	457	60 x 60 x 70	GREY
7022S63010GL	S6	10	3000-80	784	100 x 100 x 100	GREY





mod.S6
Medium diffusing 60°

Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
7022S63006CL	S6	6,5	3000-80	457	60 x 60 x 70	CORTEN
7022S63010CL	S6	10	3000-80	784	100 x 100 x 100	CORTEN





mod.S6
Medium diffusing 60°

Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
7022S63006NL	S6	6,5	3000-80	457	60 x 60 x 70	ANTHRACITE
7022S63010NL	S6	10	3000-80	784	100 x 100 x 100	ANTHRACITE



mod.S6
Medium diffusing 60°

LED | CE | 220 V= | IP66 | IK08 | RG0/RG1 | 3 step MacAdam | L80-B50 > 75.000h | L80-B20 > 50.000h | SEA TREATMENT | 7 YEARS OF WARRANTY

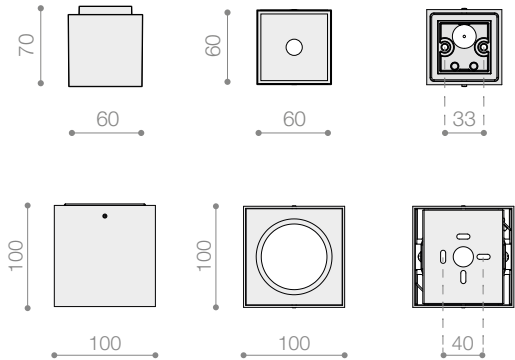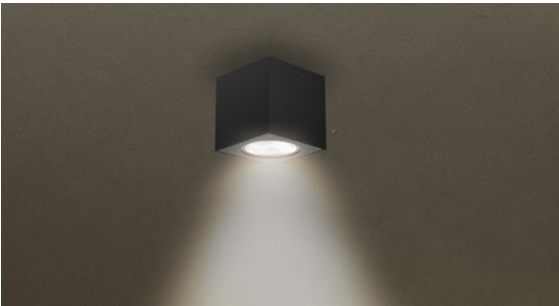

Website QR

CRIO


Wall / Ceiling




Code	Mod.	W	°K-CRI	Lm OUTPUT	Ø x H (mm)	Col.
7014B33024EL	B3	24	3000-80	2625	280 x 55	WHITE
7014B34024EL	B3	24	4000-80	2768	280 x 55	WHITE

W	Lm OUTPUT
10	1197
15	1697
18	2012
21	2322
24	2625

W	Lm OUTPUT
10	1262
15	1789
18	2121
21	2448
24	2768




mod.B3



Code	Mod.	W	°K-CRI	Lm OUTPUT	Ø x H (mm)	Col.
7014G33024EL	G3	24	3000-80	2625	280 x 55	GREY
7014G34024EL	G3	24	4000-80	2768	280 x 55	GREY

W	Lm OUTPUT
10	1197
15	1697
18	2012
21	2322
24	2625

W	Lm OUTPUT
10	1262
15	1789
18	2121
21	2448
24	2768



mod.G3






ACC271



ACC272

Code	Description
ACC271	45° installation wall bracket white color.
ACC272	45° installation wall bracket grey color.

LED | CE | 220 V~ | IP66 | IK09 | RG0/RG1 | CRI >80 | 3 step MacAdam | L80-B50>100.000h | L90-B10>60.000h | SEA TREATMENT | Dip-switch | 7 YEARS OF WARRANTY



Website QR




ZOE

Wall / Ceiling




Code	Mod.	W	°K-CRI	Lm OUTPUT	Ø x H (mm)	Col.
7012B33020EL	B3	20	3000-80	1917	280 x 55	WHITE
7012B34020EL	B3	20	4000-80	2021	280 x 55	WHITE



mod.B3



Code	Mod.	W	°K-CRI	Lm OUTPUT	Ø x H (mm)	Col.
7012G33020EL	G3	20	3000-80	1917	280 x 55	GREY
7012G34020EL	G3	20	4000-80	2021	280 x 55	GREY




mod.G3

	Code	Description
	ACC271	45° installation wall bracket white color.
	ACC272	45° installation wall bracket grey color.



220 V~ 240 V~
 
-25°C ~ +45°C
 IP66 IK09 RG0/RG1 CRI >80
 
3 step MacAdam
 L80-B50>100.000h L90-B10>60.000h
 
SEA TREATMENT

7 YEARS OF WARRANTY

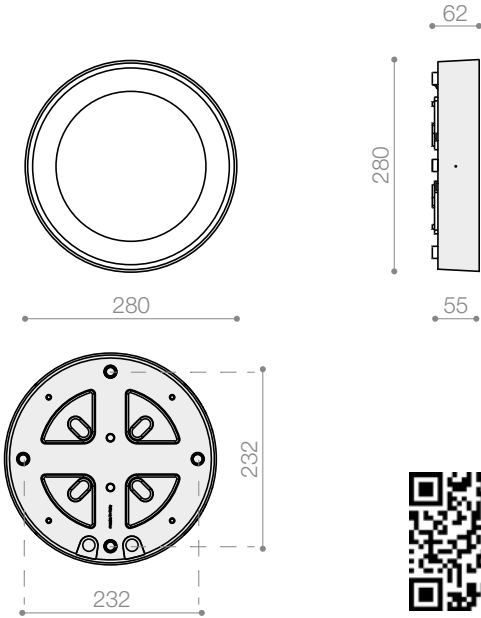

Website QR

GEM


Wall / ceiling



Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
7016B33015EL	B3	15	3000-80	1036	200 x 55 x 100	WHITE
7016B34015EL	B3	15	4000-80	1092	200 x 55 x 100	WHITE

7016B33015EL	7016B34015EL
W	Lm OUTPUT
10	763
15	1036

7016B33015EL	7016B34015EL
W	Lm OUTPUT
10	804
15	1092




mod.B3



Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
7016G33015EL	G3	15	3000-80	1036	200 x 55 x 100	GREY
7016G34015EL	G3	15	4000-80	1092	200 x 55 x 100	GREY

7016G33015EL	7016G34015EL
W	Lm OUTPUT
10	763
15	1036


7016G33015EL	7016G34015EL
W	Lm OUTPUT
10	804
15	1092



mod.G3



LED | CE | 220 V= | IP66 | IK09 | RG0/RG1 | CRI >80 | 3 step MacAdam | L80-B50>100.000h | L90-B10>60.000h | IN - OUT | SEA TREATMENT | Dip-switch | 7 YEARS OF WARRANTY

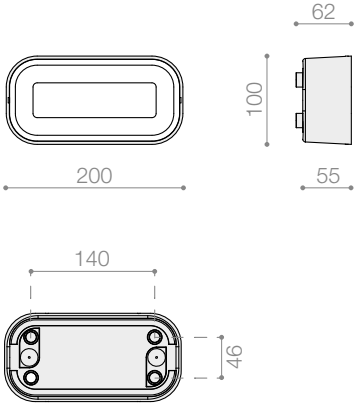

Website QR



SPOTLIGHT





ROD

Spotlight





Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
------	------	---	--------	--------------	----------------	------





mod.M3
Spot 36°

Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
------	------	---	--------	--------------	----------------	------





mod.M3
Spot 36°

Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
------	------	---	--------	--------------	----------------	------



mod.M3
Spot 36°

Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
------	------	---	--------	--------------	----------------	------



mod.M3
Spot 36°

LED | CE | 220 V~ | IP66 | IK08 | RG0/RG1 | 3 step MacAdam | L80-B50 > 75.000h | L80-B20 > 50.000h | Pre-cablato cavo H07RNH-F(800 mm) | SEA TREATMENT | 7 YEARS OF WARRANTY




Code	Description	Installation
------	-------------	--------------




ACC305 Black technopolymer stake length 230 mm

Ground

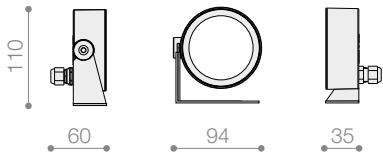


Website QR




ROD

Spotlight with picket

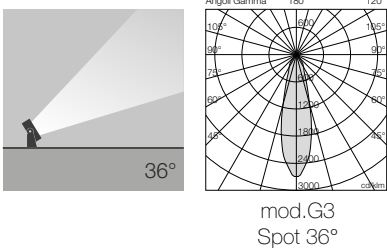

Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
7050G33010BL	G3	10	3000-80	761	94 x 60 x 345	WHITE
7050G33015BL	G3	15	3000-80	1142	94 x 60 x 345	WHITE
7050G33010GL	G3	10	3000-80	761	94 x 60 x 345	GREY
7050G33015GL	G3	15	3000-80	1142	94 x 60 x 345	GREY
7050G33010CL	G3	10	3000-80	761	94 x 60 x 345	CORTEN
7050G33015CL	G3	15	3000-80	1142	94 x 60 x 345	CORTEN
7050G33010NL	G3	10	3000-80	761	94 x 60 x 345	ANTHRAците
7050G33015NL	G3	15	3000-80	1142	94 x 60 x 345	ANTHRAците

LED | CE | 220/240 V~ | IP66 | IK08 | RG0/RG1 | 3 step MacAdam | L80-B50 > 75.000h | L80-B20 > 50.000h | Pre-wired cable H07RN-F (800 mm) | SEA TREATMENT | 7 YEARS OF WARRANTY

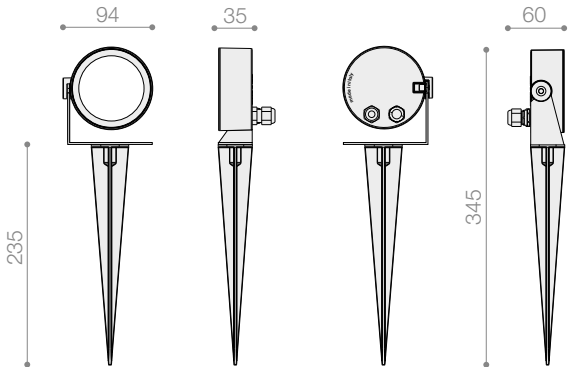


Website QR

BOLLARD



OLAF

Bollard

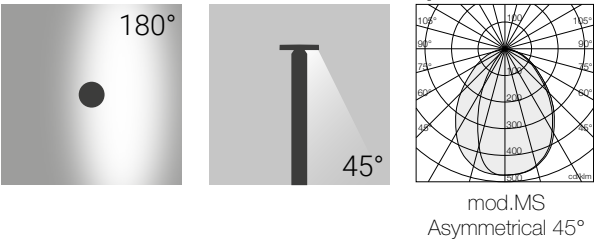


Code	Mod.	W	°K-CRI	Lm OUTPUT	ØxH (mm)	Col.
7060MS3007B4	MS	7,5	3000-80	595	150 x 400	WHITE
7060MS3007B7	MS	7,5	3000-80	595	150 x 700	WHITE
7060MS3007G4	MS	7,5	3000-80	595	150 x 400	GREY
7060MS3007G7	MS	7,5	3000-80	595	150 x 700	GREY
7060MS3007C4	MS	7,5	3000-80	595	150 x 400	CORTEN
7060MS3007C7	MS	7,5	3000-80	595	150 x 700	CORTEN
7060MS3007N4	MS	7,5	3000-80	595	150 x 400	ANTHRACTE
7060MS3007N7	MS	7,5	3000-80	595	150 x 700	ANTHRACTE


| | 220 V~ 240 | | IP66 | IK08 | RG0/RG1 | 3 step MacAdam | L80-B50 > 75.000h | L80-B20 > 50.000h | Pre-wired cable H07RN-F (100 mm) | SEA TREATMENT | 7 YEARS OF WARRANTY



	Code	Description	Installation
	ACC340	Template, tie rods and screws for ground base fixing	Ground

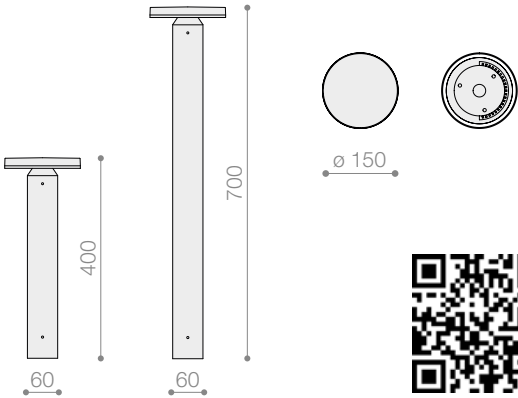

OLAF
Bollard

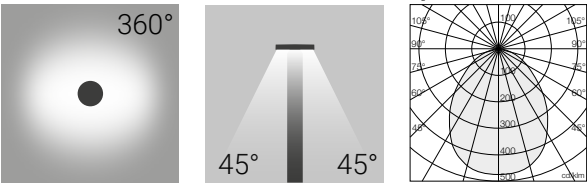

mod.RS
Rotosymmetrical 360°




Code	Mod.	W	°K-CRI	Lm OUTPUT	ØxH (mm)	Col.
7060RS3013B4	RS	13	3000-80	997	150 x 400	WHITE
7060RS3013B7	RS	13	3000-80	997	150 x 700	WHITE
7060RS3013G4	RS	13	3000-80	997	150 x 400	GREY
7060RS3013G7	RS	13	3000-80	997	150 x 700	GREY
7060RS3013C4	RS	13	3000-80	997	150 x 400	CORTEN
7060RS3013C7	RS	13	3000-80	997	150 x 700	CORTEN
7060RS3013N4	RS	13	3000-80	997	150 x 400	ANTHRACTE
7060RS3013N7	RS	13	3000-80	997	150 x 700	ANTHRACTE

LED | CE | 220 V~ 240 | IP66 | IK08 | RG0/RG1 | 3 step MacAdam | L80-B50 > 75.000h L80-B20 > 50.000h | Pre-wired cable H07RN-F (100 mm) | SEA TREATMENT | 7 YEARS OF WARRANTY




Code	Description	Installation
ACC340	Template, tie rods and screws for ground base fixing	Ground

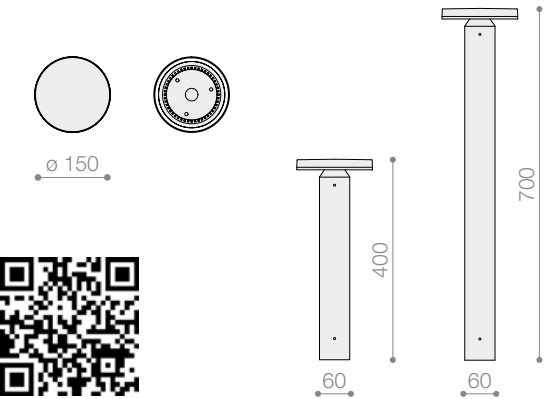

Website QR




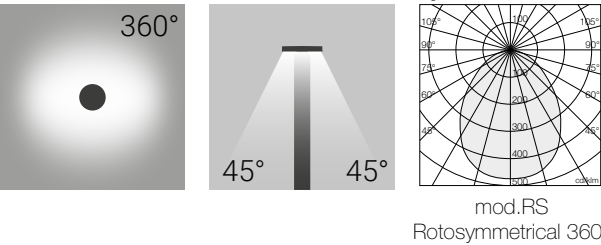

Code	Mod.	W	°K-CRI	Lm OUTPUT	ØxH (mm)	Col.
7060RS3013GL	RS	13	3000-80	997	150 x 120	GREY
7060RS3013NL	RS	13	3000-80	997	150 x 120	ANTHRACITE


LED | CE | 220 240 V~ | IP66 | IK08 | RG0/RG1 | 3 step MacAdam | L80-B50 > 75.000h | L80-B20 > 50.000h | Pre-cablato cavo H07RN-F (100 mm) | SEA TREATMENT | 7 YEARS OF WARRANTY

Designed for installation on a standard 60 mm diameter pole.


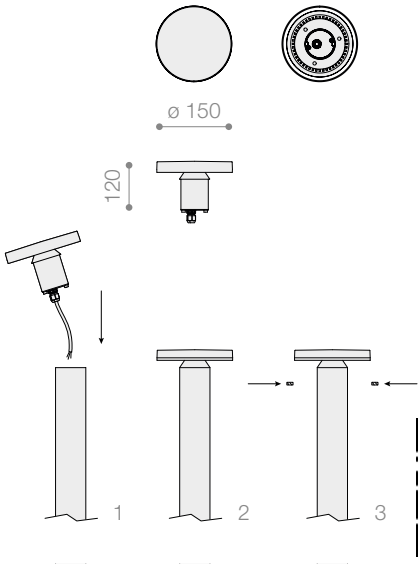


BOSTON

Bollard

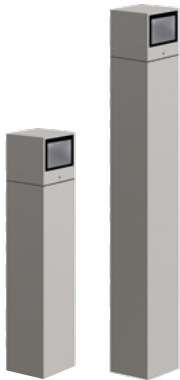


Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
7023AM3007G4	AM	7	3000-80	491	60 x 60 x 400	GREY
7023AM3007G7	AM	7	3000-80	491	60 x 60 x 700	GREY
7023AM3007N4	AM	7	3000-80	491	60 x 60 x 400	ANTHRACITE
7023AM3007N7	AM	7	3000-80	491	60 x 60 x 700	ANTHRACITE



mod.AM
Asymmetrical 45°



Code	Mod.	W	°K-CRI	Lm OUTPUT	L x P x H (mm)	Col.
7023AB3014G4	AB	14	3000-80	981	60 x 60 x 400	GREY
7023AB3014G7	AB	14	3000-80	981	60 x 60 x 700	GREY
7023AB3014N4	AB	14	3000-80	981	60 x 60 x 400	ANTHRACITE
7023AB3014N7	AB	14	3000-80	981	60 x 60 x 700	ANTHRACITE




mod.AB
Bi-asymmetrical 45°

LED |
 CE |
 220/240 V~ |
 IP66 |
 IK08 |
 RG0/RG1 |
 3 step MacAdam |
 L80-B50 > 75.000h |
 L80-B20 > 50.000h |
 SEA TREATMENT |
 7 YEARS OF WARRANTY



	Code	Description	Installation
	ACC338	Template, tie rods and screws for ground base fixing	Ground



Website QR





Via delle industrie, 1
Crespiatica (LO) 26835
T. +39 0371 484029
48h@tec-mar.it
www.tec-mar.it

Made in Italy